

SUBMERSIBLE MOTOR

4" WATER LUBRICATED REWINDABLE MOTORS

TECHNICAL SPECIFICATIONS:

- 4" Water Lubricated Motors are rewindable.
- Coupling dimensions as per NEMA standard.
- Winding wire : Polywrapped.
- Degree of protection : Ip68.
- Max water temperature : 35° C.
- Start per hour : 30 time (Max.).
- Allowable voltage variation +6% - 10%.
- Motor shaft of Stainless Steel.
- Stator shell of Stainless Steel.
- Max depth immersion : 250 M.
- Mounting : vertical / horizontal.
- Upper / Lower bracket in Cast Iron with Epoxy Paint OR
- Upper Bracket Steel Cast/ Lower bracket with SS Cladding.
- Single Phase Motors are Capacitor start and run.
- Motor Cable length : 3 Meter (3 Core / 4 Core).
- Coolant : Clear Water.

VERSIONS:

Single Phase : 0.37 kW to 4.00 kW, 220 - 230Volt / 50 Hz.


0.37 kW to 4.00 kW, 230Volt / 60 Hz.

Three Phase : 0.55 kW to 7.50 kW, 380 - 415Volt / 50 Hz.

0.37 kW to 7.50 kW, 230 - 380 - 460Volt /60 Hz.

Motors with other Voltage and frequency ratings are also available on specific demand.

4" W/L REWINDABLE MOTOR

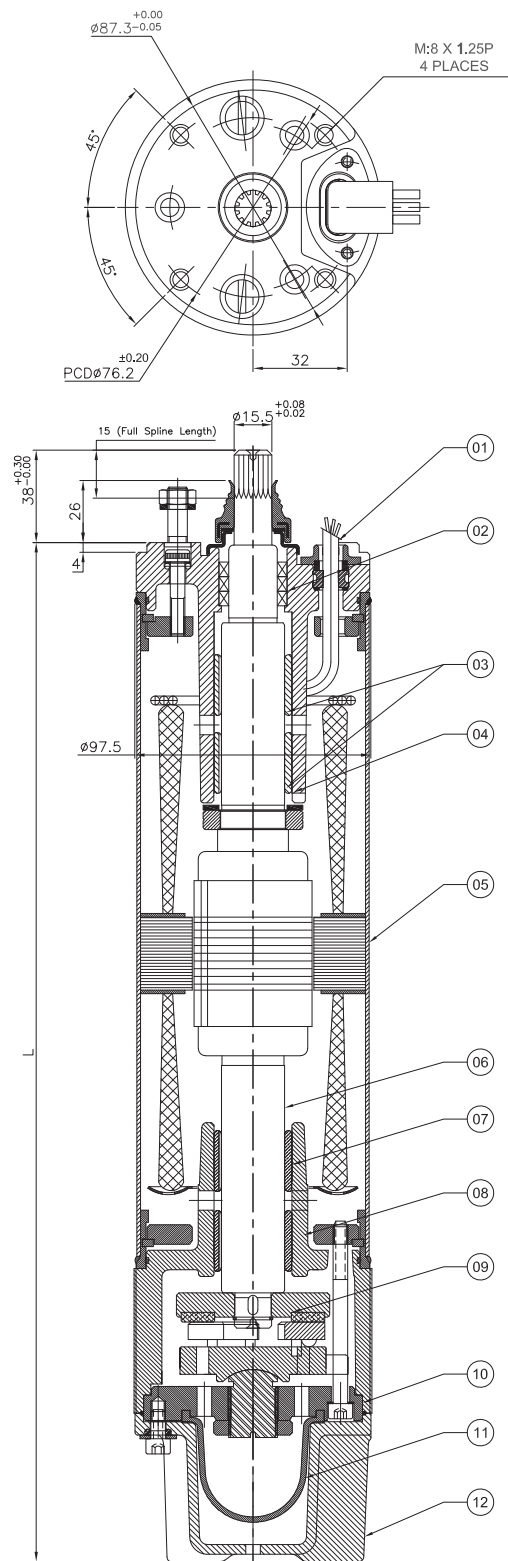

SUBMERSIBLE MOTOR

SR NO.	PART'S NAME	MATERIAL
01	CABLE 3 CORE/4 CORE	EPR
02	OIL SEAL	N.B.R
03	BEARING BUSH	CARBON
04	UPPER HOUSING	S.S 304/ CAST IRON (F.G 200) / CLADED
05	MOTOR SHELL	S.S.304
06	ROTOR SHAFT	S.S.431
07	BEARING BUSH	CARBON
08	LOWER HOUSING	CAST IRON / CLADED
09	THRUST BEARING SET	CARBON / S.S 420
10	BEARING BASE PLATE	CAST IRON
11	PRESSURE CUP	HBR
12	MOTOR BASE	S.S.304/CAST IRON (F.G 200)
13	ALL HARDWARE	S.S.304

P _N		PW L [mm] c.i. / s.s.	MOTOR WEIGHT [kg]		MOTOR WEIGHT (incl.pkg) [kg]	
[kW]	[HP] (S.P)		S.S. 304	Cast Iron	S.S. 304	Cast Iron
0.37	0.50	526	12.0	12.2	13.8	15.7
0.55	0.75	526	12.0	12.2	13.8	15.7
0.75	1.00	541	12.5	12.6	14.2	16.2
1.10	1.50	556	12.8	13.2	14.7	16.7
1.50	2.00	641	20.6	21.7	23.7	24.0
2.20	3.00	691	23.2	24.3	26.0	27.0
3.70	5.00	911	36.2	38.4	40.5	42.0

P _N		PW L [mm] c.i. / s.s.	MOTOR WEIGHT [kg]		MOTOR WEIGHT (incl.pkg) [kg]	
[kW]	[HP] (T.P)		S.S. 304	Cast Iron	S.S. 304	Cast Iron
0.37	0.50	568	12.9	13.2	15.0	17.0
0.55	0.75	568	12.9	13.2	15.0	17.0
0.75	1.00	603	16.9	17.2	20.2	22.2
1.10	1.50	603	16.9	17.2	20.2	22.2
1.50	2.00	623	20.0	21.0	23.0	24.0
2.20	3.00	673	22.5	23.6	25.2	26.2
2.98	4.00	713	23.8	25.0	26.7	27.7
		743	24.8	26.0	27.7	28.7
3.70	5.00	773	33.5	35.4	38.0	39.0
4.40	6.00	833	36.1	38.1	40.9	42.0
5.50	7.50	913	36.2	38.4	40.5	43.0
7.50	10.00	968	38.4	40.7	42.9	45.6

Technical Data of 4" Motors Single Phase (220-230 Volt / 50 Hz) CSR

PN		Thrust Load [N]	UN [V]	nN [min-1]	IN [A]	IA [A]	η [%]			cos ϕ			TN [Nm]	TA [Nm]	Capacitor Running F (Uc=450V)
[H.P.]	[kW]						50	75	100	50	75	100			
0.50	0.37	1500	220	2855	3.21	10.6	37	49	56	0.89	0.93	0.96	1.21	0.93	72
			230	2860	3.40	11.3	36	47	54	0.82	0.84	0.93	1.21	1.02	
0.75	0.55	1500	220	2845	4.19	15.38	47	58	64	0.91	0.94	0.97	1.86	1.28	72
			230	2855	4.29	16.11	46	57	64	0.82	0.91	0.93	1.86	1.42	
1.00	0.75	1500	220	2845	5.79	20.21	45	56	61	0.95	0.98	0.99	2.45	1.99	72
			230	2855	5.70	21.10	43	53	61	0.91	0.96	0.98	2.45	2.19	
1.50	1.10	3000	220	2850	8.41	30.11	47	58	64	0.91	0.95	0.98	3.70	2.81	72
			230	2855	8.58	31.50	44	54	63	0.82	0.90	0.95	3.70	3.10	
2.00	1.50	3000	220	2805	10.59	33.91	52	62	68	0.92	0.95	0.98	4.97	3.28	72
			230	2825	10.59	35.38	50	59	67	0.81	0.90	0.96	4.97	3.62	
3.00	2.20	4000	220	2815	16.00	54.1	52	60	64	0.95	0.96	0.99	7.41	4.37	108
			230	2840	15.51	56.6	51	62	66	0.85	0.92	0.97	7.41	4.82	
4.00	3.00	4000	220	2810	20.1	72	55	61	66	0.94	0.96	0.96	10	6	108
			230	2830	20.0	74	52	61	67	0.85	0.93	0.97	9.94	6.5	
5.50	4.00	4000	220	2815	25.5	92.0	55	62	67	0.95	0.96	0.97	13.7	8.90	108
			230	2830	25.2	95.7	53	62	67	0.86	0.94	0.98	13.6	8.98	

Technical Data of 4" Motors Single Phase (220-230 Volt / 50 Hz) CSCR

PN		Thrust Load [N]	UN [V]	nN [min-1]	IN [A]	IA [A]	η (Eff.) [%] at % load			cos ϕ (PF) at % load			TN [Nm]	TA [Nm]	Capacitor Running μ F (Uc=450V)	Capacitor Starting μ F (Uc=270V)
[H.P.]	[kW]						50	75	100	50	75	100				
0.50	0.37	1500	220	2890	4.21	15.11	50	60	62	0.51	0.64	0.74	1.21	2	72	100-120
			230	2890	4.00	14.30	50	60	62	0.51	0.64	0.74	1.21	2		
0.75	0.55	1500	220	2895	6.29	24.11	51	59	63	0.49	0.60	0.69	1.79	2.7	72	100-120
			230	2895	6.00	23.00	51	59	63	0.49	0.60	0.69	1.79	2.7		
1.00	0.75	1500	220	2890	7.59	29.5	55	63	64	0.55	0.66	0.76	2.51	4.1	72	100-120
			230	2890	7.31	28.2	55	63	64	0.55	0.66	0.76	2.51	4.1		
1.50	1.10	3000	220	2890	9.58	41.3	57	66	68	0.58	0.72	0.80	3.69	6.0	72	100-120
			230	2890	8.90	39.5	57	66	68	0.58	0.72	0.80	3.69	6.0		
2.00	1.50	3000	220	2880	11.58	55.7	61	67	68	0.70	0.82	0.88	4.89	8.28	72	100-120
			230	2880	11.10	53.5	61	67	68	0.70	0.82	0.88	4.89	8.28		
3.00	2.20	4000	220	2885	16.71	83	62	68	70	0.71	0.81	0.88	7.41	14	108	120-150
			230	2885	15.89	87	62	68	70	0.71	0.81	0.88	7.41	14		
4.00	3.00	4000	220	2885	20.6	103	62	68	71	0.73	0.82	0.88	9.75	18.5	108	120-150
			230	2885	20.3	112	62	68	71	0.73	0.82	0.88	9.75	18.5		
5.50	4.00	4000	220	2885	25.8	129	63	69	71	0.74	0.82	0.89	13.4	24.1	108	120-150
			230	2885	25.6	141	63	69	71	0.74	0.82	0.89	13.4	24.1		

- PN - Rated Output
- UN - Rated Voltage
- nN- RPM
- IN - Full Load Current
- IA - Starting Current
- η - Motor Efficiency
- cos ϕ - Power Factor
- TN - Full Load Torque
- TA - Starting Torque
- F{N}- Axial Thrust Load

SUBMERSIBLE MOTOR

Technical Data of 4" Motors Three Phase (380-415 Volt / 50 Hz)

P _N		Thrust F [N]	U _N [V]	n _N [min ⁻¹]	I _N [A]	I _A [A]	η (Eff.) [%] at % load			cos φ (PF) at % load			T _N [Nm]	T _A [Nm]
[H.P.]	[kW]						50	75	100	50	75	100		
0.75	0.55	1500	380	2835	1.59	6.00	60	66	67	0.60	0.72	0.81	1.89	3.11
			400	2855	1.59	6.38	58	65	67	0.54	0.68	0.75	1.89	3.51
			415	2875	1.70	6.61	55	64	66	0.50	0.64	0.80	1.89	3.70
1.00	0.75	1500	380	2845	2.11	8.88	64	67	70	0.58	0.71	0.79	2.50	4.81
			400	2870	2.11	9.30	60	68	69	0.51	0.64	0.75	2.50	5.32
			415	2880	2.20	9.81	58	65	68	0.49	0.61	0.72	2.50	5.89
1.50	1.10	3000	380	2825	3.00	13.70	68	72	73	0.58	0.72	0.81	3.79	9.61
			400	2840	3.00	14.51	67	71	73	0.53	0.67	0.75	3.69	10.60
			415	2860	3.11	15.28	65	70	72	0.50	0.62	0.72	3.69	11.49
2.00	1.50	3000	380	2845	3.91	18.59	68	72	73	0.60	0.72	0.81	5.0	11.31
			400	2855	4.00	19.21	66	72	73	0.54	0.66	0.77	5.0	12.60
			415	2870	4.10	20.21	64	70	72	0.49	0.62	0.73	4.9	13.49
3.00	2.20	4000	380	2820	5.80	28.68	71	75	75	0.59	0.72	0.81	7.59	21.71
			400	2840	5.91	28.90	70	73	75	0.51	0.65	0.76	7.51	23.61
			415	2870	6.29	30.78	66	71	74	0.46	0.60	0.69	7.51	25.90
4.00	3.00	4000	380	2810	8.5	29.5	62	67	70	0.72	0.78	0.82	10	16
			400	2820	8.2	31.0	61	66	68	0.71	0.77	0.80	9.97	17.95
			415	2850	8.0	33.0	60	65	67	0.70	0.76	0.80	9.87	18.75
5.50	4.00	4000	380	2790	10.79	32.29	62	67	71	0.72	0.79	0.83	13.39	21.25
			400	2790	10.51	34.00	61	65	69	0.70	0.76	0.82	13.30	23.54
			415	2810	10.0	35.00	59	64	66	0.69	0.74	0.82	13.30	25.29
7.50	5.50	4000	380	2785	14.79	50.4	69	73	74	0.74	0.79	0.84	18.93	37.19
			400	2790	14.51	53.0	68	72	73	0.74	0.79	0.84	18.92	41.21
			415	2810	14.00	54.9	67	69	71	0.73	0.77	0.83	18.81	44.35
10.0	7.50	4000	380	2855	18.00	61.1	70	72	73	0.98	0.95	0.92	24.58	45.10
			400	2860	18.31	62.0	67	71	72	0.99	0.94	0.91	24.51	46.00
			415	2880	18.79	65.9	66	68	70	0.97	0.92	0.88	24.40	47.51

- P_N - Rated Output
- U_N - Rated Voltage
- n_N - RPM
- I_N - Full Load Current
- I_A - Starting Current
- η - Motor Efficiency
- cosφ - Power Factor
- T_N - Full Load Torque
- T_A - Starting Torque
- F_N - Axial Thrust Load

Technical Data of 4" Motors Single Phase / 60 Hz (CSR)

PN		Thrust Load [N]	UN [V]	nN [min-1]	IN [A]	IA [A]	η (Eff.) [%] at % load			cos φ (PF) at % load			TN [Nm]	TA [Nm]	Capacitor Running μF (Uc=450V)
[H.P.]	[kW]						50	75	100	50	75	100			
0.5	0.37	3000	230	3450	4.2	10.7	43	53	60	0.76	0.79	0.88	1.02	0.86	72
0.75	0.55	3000	230	3450	5	15.4	50	60	67	0.83	0.91	0.95	1.53	1.16	72
1.0	0.75	3000	230	3460	7	20.2	46	55	62	0.90	0.95	0.98	2.03	1.81	72
1.5	1.1	3000	230	3450	9.5	30.1	49	59	67	0.81	0.88	0.93	3.06	2.57	72
2.0	1.5	3000	230	3450	12	33.9	53	63	70	0.83	0.91	0.96	4.07	2.97	72
3.0	2.2	4000	230	3430	16	54.2	58	68	73	0.87	0.94	0.98	6.15	4.00	108

- PN - Rated Output
- UN - Rated Voltage
- nN - RPM
- IN - Full Load Current
- IA - Starting Current
- η - Motor Efficiency
- cosφ - Power Factor
- TN - Full Load Torque
- TA - Starting Torque
- F(N) - Axial Thrust Load

Technical Data of 4" Motors Single Phase / 60 Hz (CSCR)

PN		Thrust Load [N]	UN [V]	nN [min-1]	IN [A]	IA [A]	η (Eff.) [%] at % load			cos φ (PF) at % load			TN [Nm]	TA [Nm]	Capacitor Running ηF (Uc=450V)	Capacitor Starting μF (Uc=270V)
[H.P.]	[kW]						50	75	100	50	75	100				
0.5	0.37	3000	230	3480	4.2	15.2	57	64	67	0.50	0.59	0.68	1.01	1.68	72	100-120
0.75	0.55	3000	230	3485	6.5	24.2	57	65	68	0.49	0.59	0.70	1.51	2.27	72	100-120
1.0	0.75	3000	230	3490	7.8	30	54	62	65	0.53	0.64	0.73	2.01	3.3	72	100-120
1.5	1.1	3000	230	3490	9.6	41.5	60	67	70	0.59	0.70	0.79	3.04	4.92	72	100-120
2.0	1.5	3000	230	3480	12.5	55.3	63	71	74	0.69	0.80	0.89	4.04	6.87	72	100-120
3.0	2.2	4000	230	3475	16.5	82	67	74	77	0.70	0.81	0.89	6.07	11.5	108	120-150
5.5	4.0	4000	230	3450	26.0	130	68	74	77	0.70	0.82	0.98	11.2	21.2	108	200-250

- PN - Rated Output
- UN - Rated Voltage
- nN - RPM
- IN - Full Load Current
- IA - Starting Current
- η - Motor Efficiency
- cosφ - Power Factor
- TN - Full Load Torque
- TA - Starting Torque
- F(N) - Axial Thrust Load


SUBMERSIBLE MOTOR

Technical Data of 4" Motors Three Phase / 60 Hz

P _N		Thrust Load [N]	U _N [V]	n _N [min ⁻¹]	I _N [A]	I _A [A]	η (Eff.) [%] at % load			cos φ (PF) at % load			T _N [Nm]	T _A [Nm]
[H.P.]	[kW]						50	75	100	50	75	100		
0.5	0.37	3000	230	3445	2.41	9.6	59	62	64	0.58	0.71	0.79	1.02	1.84
			380	3445	1.42	5.6	59	62	64	0.58	0.71	0.79	1.02	1.96
			460	3445	1.21	4.8	59	62	64	0.58	0.71	0.79	1.02	2.24
0.75	0.55	3000	230	3450	3.10	12.4	63	67	69	0.57	0.71	0.80	1.53	2.3
			380	3450	1.91	7.6	63	67	69	0.57	0.71	0.80	1.53	2.5
			460	3450	1.60	6.4	63	67	69	0.57	0.71	0.80	1.53	2.75
1.0	0.75	3000	230	3455	3.91	17.55	65	68	70	0.59	0.72	0.81	2.03	3.55
			380	3455	2.32	10.35	65	68	70	0.59	0.72	0.81	2.03	3.9
			460	3455	2.00	9	65	68	70	0.59	0.72	0.81	2.03	4.47
1.5	1.1	3000	230	3445	5.00	25	70	73	76	0.61	0.76	0.83	3.04	6.69
			380	3445	3.00	15	70	73	76	0.61	0.76	0.83	3.04	7.7
			460	3445	2.51	12.5	70	73	76	0.61	0.76	0.83	3.04	8.2
2.0	1.5	3000	230	3445	6.71	33.5	64	66	69	0.59	0.73	0.81	4.08	8.16
			380	3445	4.11	20.5	64	66	69	0.59	0.73	0.81	4.08	9.22
			460	3445	3.40	17	64	66	69	0.59	0.73	0.81	4.08	10.2
3.0	2.2	4000	230	3450	9.51	47.5	70	73	75	0.52	0.65	0.74	6.11	15.3
			380	3450	5.80	29	70	73	75	0.52	0.65	0.74	6.11	17.4
			460	3450	4.82	24	70	73	75	0.52	0.65	0.74	6.11	18.33
5.5	4.0	6500	230	3450	15.91	55.65	69	71	74	0.52	0.66	0.75	11.2	15.70
			380	3450	9.62	33.6	69	71	74	0.52	0.66	0.75	11.2	17.70
			460	3450	8.00	28	69	71	74	0.52	0.66	0.75	11.2	19.04
7.5	5.5	6500	230	3445	23.0	92	71	73	76	0.56	0.68	0.77	15.30	22.95
			380	3445	13.91	55.6	71	73	76	0.56	0.68	0.77	15.30	30.00
			460	3445	11.51	46	71	73	76	0.56	0.68	0.77	15.30	33.70
10.0	7.5	6500	230	3450	27.1	95	70	73	75	0.58	0.71	0.80	20.4	32.64
			380	3450	19.29	67.55	70	73	75	0.58	0.71	0.80	20.4	37.33
			460	3450	15.91	55.65	70	73	75	0.58	0.71	0.80	20.4	44.90

- P_N - Rated Output
- U_N - Rated Voltage
- n_N - RPM
- I_N - Full Load Current
- I_A - Starting Current
- η - Motor Efficiency
- cosφ - Power Factor
- T_N - Full Load Torque
- T_A - Starting Torque
- F(N) - Axial Thrust Load

Exploded Drawing of 4" WF Motor

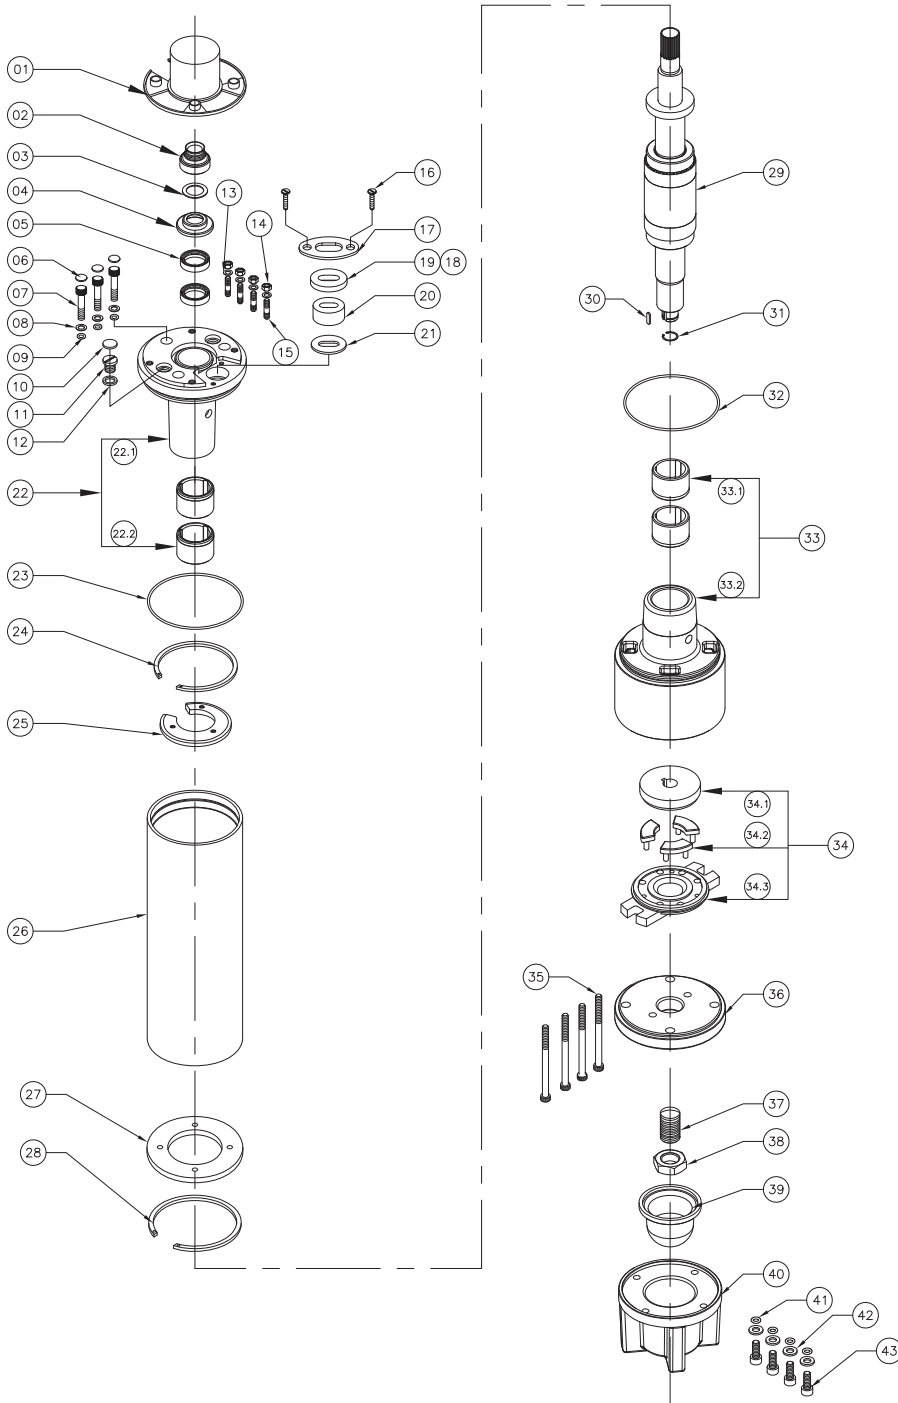

No.	PART'S NAME
1	ROTOR CAP
2	SAND GUARD
3	TEFLON WASHER
4	UPPER CAP
5	OIL SEAL
6	ALLEN BOLT CAP
7	ALLEN BOLT
8	ALLEN BOLT WASHER
9	ALLEN BOLT 'O' RING
10	DRAIN PLUG CAP
11	DRAIN PLUG
12	DRAIN PLUG 'O' RING
13	SPRING WASHER
14	HEX NUT
15	STUD
16	ALLEN BOLT(FOR CABLE CLIP)
17	CABLE CLIP
18	PLASTIC GROMMET WASHER
20	CABLE GROMMET
21	S.S. GROMMET WASHER
22	UPPER WITH BUSH
22.1	UPPER HOUSING
22.2	BEARING BUSH
23	O' RING (UPPER SIDE)
24	CIR CLIP (UPPER SIDE)
25	UPPER FLANGE
26	STATOR BODY
27	LOWER FLANGE
28	CIR CLIP (UPPER SIDE)
29	ROTOR FINISH
30	ROTOR KEY
31	CIR CLIP (ROTOR SIDE)
32	O' RING (LOWER SIDE)
33	LOWER HOUSING WITH BUSH
33.1	BEARING BUSH
33.2	LOWER HOUSING
34	COUTER THRUST BEARING SET
35	ALLEN BOLT
36	BEARING BASE PLATE
37	ROCKER
38	ROCKER LOCK NUT
39	PRESSURE CUP
40	MOTOR BASE
41	O' RING
42	WASHER
43	ALLEN BOLT